

[p] Hook for **FLEX** L1506VR, L9-11 125, LE9-11 125, L12-11 125, L13-10 125-EC, LE14-7 125 INOX, L15-11 125, LE15-11 125, L3406VRG, LB17-11 125 type



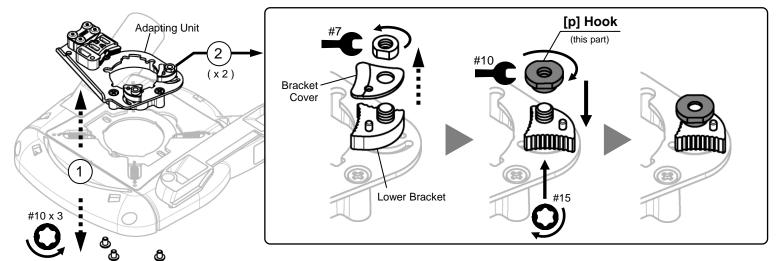

- (1) Loosen M4 Bolt x 3pcs. at back side and detach the Adapting Unit.
- (2) Detach the Bracket Cover and attach **[p] Hook** (this part) to the Lower Brackets. (2pcs.)
- (3) Change the Upper Bracket direction by operating [d] Wrench.
- (4) Turn the Lower Bracket counterclockwise until it stops. (2pcs.)
- (5) Re-tighten M4 Bolt x 3pcs. to return the Adapting Unit to its original position.
- * Pay attention to the position of the M4 Bolts relative to the slotted hole.

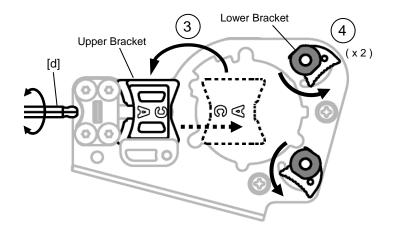