
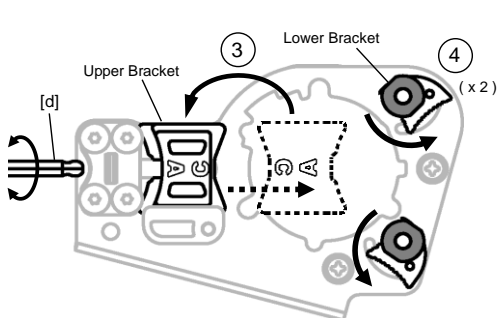


# [p] Hook for FLEX

L1506VR, L9-11 125, LE9-11 125, L12-11 125, L13-10 125-EC, LE14-7 125 INOX,  
L15-11 125, LE15-11 125, L3406VRG, LB17-11 125 type

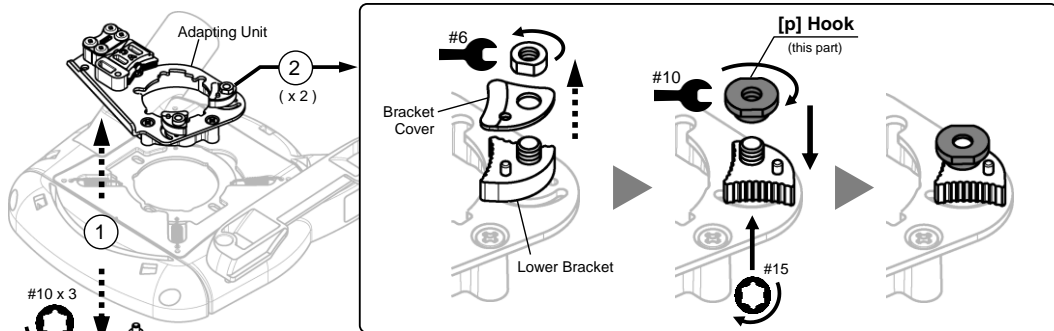

(1) Loosen M4 Bolt x 3pcs. at back side and detach the Adapting Unit.

(2) Detach the Bracket Cover and attach **[p] Hook** (this part) to the Lower Brackets. (2pcs.)

(3) Change the Upper Bracket direction by operating [d] Wrench.

(4) Turn the Lower Bracket counterclockwise until it stops. (2pcs.)

(5) Re-tighten M4 Bolt x 3pcs. to return the Adapting Unit to its original position.

※ Pay attention to the position of the M4 Bolts relative to the slotted hole.

